

Amber600-4GE2GX 6-Port Managed Industrial Ethernet Switch



Description

The Amber600-4GE2GX is a high performance, managed Gigabit switch with 4*10/100/1000Base-T auto sensing Ethernet ports and 2*1000M SFP ports. The switch supports Ethernet Ring Protection Switching (ERPS) as well as STP/RSTP/M-STP. It also supports Web-based network management, VLAN, QoS, SNMP, IGMP snooping etc. Rugged design with IP40 enclosure and industrial level 3 protection makes it suitable for applications such as Intelligent Transportation Systems, IP surveillance and industrial networks.

Advantages

- -40~+75°C operating temperature
- Support SNMPv1/v2c/v3
- 12~57VDC power input
- Lock port function based on MAC address
- Support IGMP snooping and MLD snooping
- DIN or wall mount
- Support Web、Telnet、Console、SSH
- Support ITU-T G.8032 Ethernet ring protection, typical restoration < 50ms


Specification

Item		Description
IEEE Standards	Standard	IEEE 802.3: 10Base-T
		IEEE 802.3u: 100Base-Tx and 100Base-Fx
		IEEE 802.3z 1000Base-X
		IEEE 802.3ab: 1000Base-Tx
		IEEE 802.3x
		IEEE 802.3ad
		IEEE 802.1Q
		IEEE 802.1p
		IEEE 802.1D
		IEEE 802.1W
		IEEE 802.1s
		IEEE 802.1X
IEEE 802.1AB		
Ports	Ethernet	4*10/100/1000Base-T
	SFP	2*1000Base-FX SFP
	Console	Micro USB 2.0,115200bps,8,N,1
	Alarm	Relay output for fault event alarm
Switch Performance	Capacity	12Gbps
	Switch Delay	7μS
	Priority Queues	8
	VLAN	4096
	VLAN ID Range	1~4096
	MAC Table	8K
	Memory Buffer	4M



Item		Description
Protocols	Flow Control	802.1Q VLAN、GVRP、GMRP、MVR、IGMPv1/v2
	Redundancy	ERPS、STP、RSTP、MSTP
	Security Feature	Enable/disable ports; Port based network access control (802.1x); VLAN (802.1Q); MAC based port security; RADIUS centralized password management; SNMP V1/V2c/V3 encrypted authentication and access security; SSH
	Time Management	Syslog; NTP Server/Client
	QoS	802.1P
Device Management	LED Indicator	Power1、Power2、RUN、ALARM
	Management	IPv4/IPv6、SNMP V1/V2/V3、LLDP、RMON、DHCP、Server/Client、TFTP、HTTP、HTTPS、Telnet
Power	Power Input	Dual 12~57VDC input, 5-pin terminal
	Power Consumption	<6W
	Overload Current Protection	Support
	Reverse Polarity Protection	Support
Environment	Storage Temperature	-40~+85℃
	Operating Temperature	-40~+85℃
	Operating Humidity	5%~95% non-condensing
Mechanical	Enclosure	Metal
	IP Level	IP40
	Dimensions (W x D x H)	62 x 103 x 100mm

Dimensions

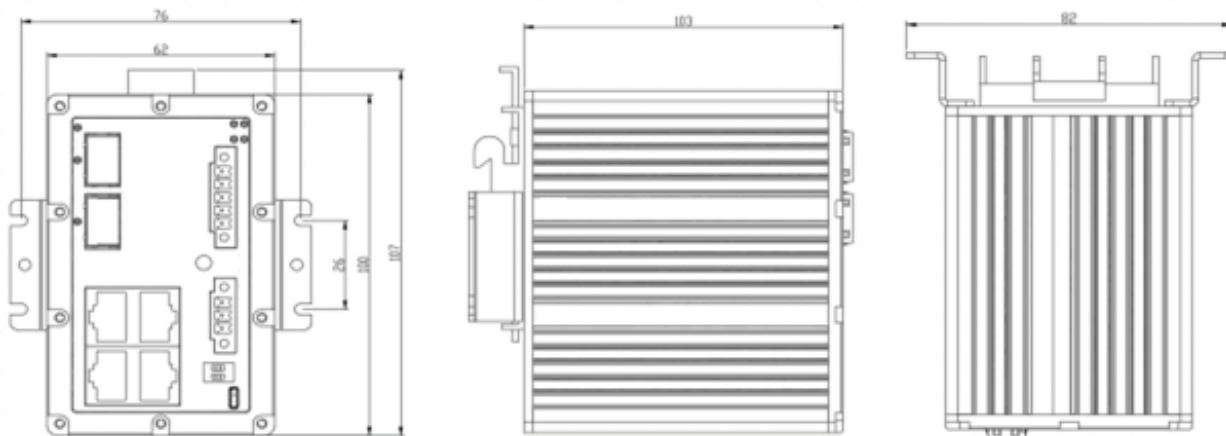



Order Information

Order Information		
Name	Part Number	Description
6-Port Managed Industrial Ethernet Switch	Amber600-4GE2GX	Managed industrial Ethernet switch with 4*10/100/1000M Ethernet ports, 2 gigabit SFP slots. 12~57VDC power input. SFP transceiver not included. Wall or DIN mount.
12-Port Managed Industrial Ethernet Switch	Amber600-8GE4GX	Managed industrial Ethernet switch with 8*10/100/1000M Ethernet ports, 4 gigabit SFP slots. 12~57VDC power input. SFP transceiver not included. Wall or DIN mount.
Accessories		
1G SFP Transceiver	VDF-3232-ISL	SFP 1G, 2 fibers, 1310nm, 3.3V, 20km, LC, single-mode, DDM
1G SFP Transceiver	VDF-31352-ISL	SFP 1G, 1 fiber, 1310/1550nm, 3.3V, 20km, LC, single-mode, DDM
1G SFP Transceiver	VDF-31532-ISL	SFP 1G, 1 fiber, 1550/1310nm, 3.3V, 20km, LC, single-mode, DDM