

Duplex Round Far Transmission Cable II

Features


- Good mechanical and environmental characteristics.
- Flame retardant characteristics meet the requirements of relevant standards.
- The mechanical characteristics meet the requirements of relevant standards.
- Soft,flexible,easy to lay and splice,and with big capacity data transmission.
- Meet various requirements of market and clients.

Application

- Mainly used in wireless base station (BS) horizaontal and vertical cabling.

Options

- Fiber Type: G.652, G.655, G.657 single-mode fiber, A1a or A1b mulit-mode fiber, or other types of fiber.
- Jacket Material: Polyvinylchloride(PVC), Low smoke zero halogen(LSZH), Thermoplastic polyurethane(TPU), or other contracted material.
- Jacket color: (including color of fiber)meets the requirements of relevant standards, or other contracted color.
- Cable Dimension: The nominal cable dimension or other contracted dimension.
- Delivery Length: 1KM or 2KM or other contracted length.
- Other Requirements: Other contracted special requests.

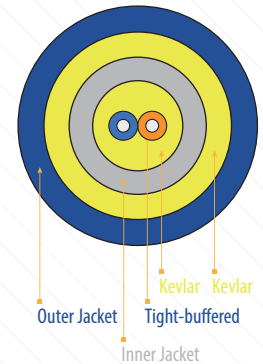

Specifications

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile(N)		Crush(N/100mm)		Min.bend Radius(mm)		Range of Long Temperature(°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
Duplex Round Far Transmission Cable II									
4	4.0*2.0	12	40/100	80/200	500/1000	1000/2200	60	30	20°C ~ +60°C

Note:1 D is outer dimensionof the round cable

Note:2 The minimum bend radius(static)is 5D when G.657 fiber is used